

H15D EXPLORER



Luces de carretera homologadas
Homologated road lights
Anerkennende Beleuchtungen
Feux de route homologués



Joystick mecánico con brakeching (botón amarillo)
Mechanical joystick with brakeching (yellow button)
Mechanischer Joystick mit Brakeching (gelber Knopf)
Joystick mécanique avec Brakeching (bouton jaune)



CARACTERISTICAS TECNICAS

(Technical details - Technische daten - Caractéristiques techniques)

Capacidad Nominal (Nominal capacity, Tragkraft, Capacité)	1500 kgr.
Mastil standard (Standard mast)	2700 mm.
Motor (Engine, Motor, Moteur)	PERKINS 403.15 (3 cil. / 32 hp)
Transmision (Transmission, Getriebe, Transmission)	Hidrostatica automotiva HP (Hydrostatic, Hydrostat, Hydrostatique)
Ruedas motrices (Driving wheels, Antrieb, Roues motrices)	4x2 & 4x4
Ancho total (Total width, Breite, Largeur)	1380 mm.
Altura total (Total height, Höhe, Hauteur)	1980 mm.
Longitud total hasta tablero (Total length up to the carriage, Länge bis zum Gabelträger, Longueur jusqu'au tablier)	2500 mm.
Peso total (Total weight, Gewicht, Poids total)	3000 Kg. (4x2) 3100 Kg. (4x4)
Altura libre a tierra (Ground clearance, Bodenfreiheit, Hauteur libre au sol)	270 mm.
Mástiles disponibles (Masts, Mäts)	2,7 Dúplex & 3,7 Triplex

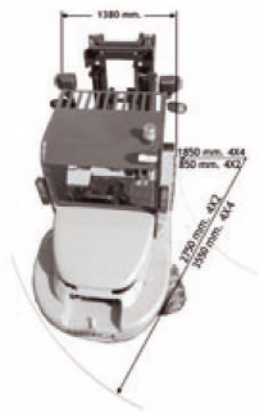

Sin carga : 1.250 kg. (4x2)
(Unloaded) 1.300 kg. (4x4)

Sin carga : 1.750 kg. (4x2)
(ohne Last) 1.800 kg. (4x4)